

Active Cooling - Standard Fan Units



RAB-CH-Xxx-X3, RAC-CH-Xxx-X3

These fan units are made especially for free-standing cabinets. They are installed into the base, top cover or door of the cabinet as required.

A fan unit for free-standing cabinets – it is installed into the top cover from outside of the cabinet, into the bottom from inside of the cabinet. It is necessary to use the installation frame of the bottom fan unit when installing into the base of the cabinet – RAX-CH-XXX-X1 which is mounted using a two-sided gluing tape.

Extension of temperatures adjustment: bimetallic thermostat

Specified voltage (V/Hz): 230/50-60

Ventilation unit for free-standing cabinets

Product code	Input (W)	Number of ventilators
RAX-CH-X03-X3	30	2
RAX-CH-X04-X3	60	4
RAX-CH-X05-X3	90	6



RAX-CH-X01-X9

- Thermostat – adjustable switching temperature range from 0 °C up to +60 °C



RAX-CH-X02-X9

- Plastic frame 120 x 120 mm with a filter



RAX-CH-X07-X9

- Fan unit for RFA, RUA cabinet 230 V, 50 Hz, 0.09 A, 15 W, 160 m3/h



RAB-CH-XXX-X1, RAC-CH-XXX-X1
Bottom fixing frame for fan unit

The installation of fan units is prepared for Tritón cabinets only.



RAB-CH-X01-A1, RAC-CH-X01-A1

- 19" horizontal fan unit, 2 fans, 2U, 220 V / 30 W, a thermostat

Supply

Screw M6 x 10	4x
Plastic washer	4x
Captive nut M6	4x



RAB-CH-X02-A1, RAC-CH-X02-A1

- 19" horizontal fan unit, 4 fans, 2U, 220 V / 60 W, a thermostat

Supply

- Screw M6 x 10 4x
- Plastic washer 4x
- Captive nut M6 4x



RAB-CH-Xxx-X1, RAC-CH-Xxx-X1

- ventilation unit for wall-mounted cabinets
Extension of temperatures adjustment: bimetallic thermostat
Specified voltage (V/Hz): 230/50-60

Ventilation unit for wall-mounted cabinets		
Product code	Input (W)	Number of ventilators
RAx-CH-X24-X1	15	1
RAx-CH-X25-X1	30	2
RAx-CH-X26-X1	45	3

Supply

- Screw M6 x 10 4x
- Plastic washer 4x
- Captive nut M6 4x




RAB-CH-X21-A1, RAC-CH-X21-A1

- 19" horizontal fan unit, 2 fans, 4U, 220 V / 30 W, a thermostat
- **Supply**
 - Screw M6 x 10 4x
 - Plastic washer 4x
 - Captive nut M6 4x



RAX-CH-X06-X9

- Fan – 230 V / 15 W, 50 Hz / 0.09 A, 160 m3/h, 120 x 120 mm

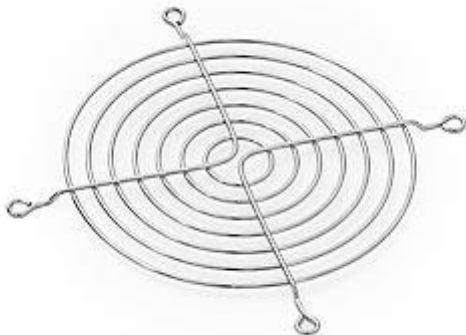

RAX-CH-X03-X9

Metal frame 120 x 120 mm without a filter